


Dimensions



Distance coded reference marks signal explanation

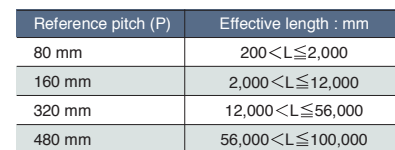


Figure 1: Schematic diagram of the test specimen. The diagram shows a long, thin rectangular specimen with a central section of length L : Effective length. The total length is 50 + L + 50. The width is 9. The thickness is 1.3. The end sections are 10 units wide. The specimen is supported at four points, labeled (4) at the ends and (4) at the supports.

Technical drawing of the 4.1 x 6 slotted hole clamp assembly. The main view shows a side profile of the clamp with dimensions: 51.5 for the end section, N x 300 for the effective length, and 51.5 for the other end section. A detail view on the right shows the cross-section with dimensions: 10.5 for the top flange, 35 x 0.8 for the main body, 24.4 for the central slot, 9 for the bottom flange, and 45 for the total height. Labels include '4.1 x 6 slotted hole', 'P' for the slot width, and 'Clamp (Accessories)'.

Technical drawing of the cable assembly showing dimensions and components:

- Overall dimensions: 63 (width), 26.4 (height), 29.5 (base width), 35 (internal width), 28 (bottom width), 12 (bottom height).
- Mounting holes: 2- $\varnothing 7.5$ Mounting hole.
- Other dimensions: 0.9 (bottom left offset), 6.9 (bottom right offset).
- Cable length: 3000.

Technical drawing of the PLB 2-W cable assembly, showing two views: a side view and a front view.

Side View Dimensions:

- Head cable length
- 2-M5 tap (M4 bolt mounting hole)
- CE mark
- Dimensions: 20, 80, 135, 20, 45, 10, 2.5
- Labels: PLB 2-W, 2-M5 tap, CE, 2-M3

Front View Dimensions:

- 2-M3 (Mounting hole)
- 2-M5 tap
- CE mark
- Dimensions: 3.5, 12, 33, 22, 18.5, 27, 26, 2, 2.6, 0.8
- Labels: PLB 2-W, CE, 2-M3

Technical drawing of the 1000 Series Power Supply showing front, side, and rear views with dimensions.

- Front View (Top):** Shows a rectangular unit with a width of 110 mm and a height of 115 mm.
- Side View (Middle):** Shows the unit's profile with a total height of 138 mm and a mounting bracket height of 124 mm.
- Rear View (Bottom):** Shows the rear panel with a width of 4.5 inches. It includes a terminal block with pins labeled 1 through 10, a ground symbol, and a label with the following specifications:
 - 250
 - 1000
 - 1000

Technical drawing of the 1000 Series Cable Mounting Bracket. The drawing includes two views with dimensions in mm:

- Top View:**
 - Overall width: 30 mm
 - Distance from top edge to top hole center: 20 mm
 - Distance from top edge to bottom hole center: 30 mm
 - Distance between hole centers: 14 mm
 - Distance from left edge to hole centers: 6.5 mm
 - Distance from left edge to mounting tab: 7.5 mm
 - Mounting tab width: 4.8 mm
 - Long hole length: 12 mm
- Side View:**
 - Overall height: 10^{+0.1} mm
 - Distance from bottom edge to hole center: 2 mm
 - Distance from bottom edge to mounting tab: 28 mm
 - Mounting tab height: 4 mm
 - Distance from mounting tab to cable end: 5 mm
 - Cable length: 1500 mm

Unit: mm

Unit: mm



DIGIRULER

High environmental resistance,
High response speed (10m/s) and high resolution (0.1μm).
Magnetic digital scale technology produces real-time
measurement data

Customer Support : 45 Suzukawa, Isehara-shi, Kanagawa 259-1146, Japan TEL.+81(0)463-92-2132 E-mail : info-css@magnescale.com

The contents of this literature are as of July 2019. Magnescale reserves the right to change product specifications without prior notice.

DIGIRULER-EA01(01)C

Magnescale Co., Ltd.

